


Certificate of Compliance

Certificate Number 20080430-R6666C
Report Reference R6666
Issue Date 2008 April 30

Page 1 of 2

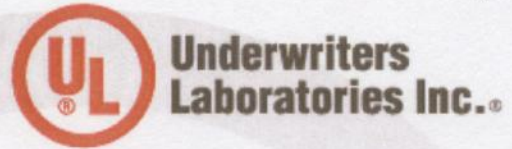

Issued to: Curries Div. of Assa Abloy Door Group LLC

5525 9th St SE
Mason City, IA 50401

*This is to certify that
representative samples of*

Swinging Type Fire Doors
Model 747 - Steel Stiffened

*Have been investigated by Underwriters Laboratories Inc.® (UL) or any authorized
licensee of UL in accordance with the Standard(s) indicated on this Certificate.*


Standard(s) for Safety:

UL 10B - Fire Tests of Door Assemblies
UL 10C-(1998) - Standard for Positive Pressure Tests of Door Assemblies
UBC 7-2(1997) Part 1 - Fire Tests of Door Assemblies, NFPA 252 - Fire Tests of Door Assemblies,
ASTM E-152 - Standard Methods of Fire Tests of Door Assemblies

Additional Information:

8'0" x 10'0" pair of doors swinging in the same direction and double egress with
18, 16 or 14 gauge face skins rated up to and including 1-1/2 hr.
8'0" x 10'0" pair of doors swinging in the same direction 18 or 16 gauge face
skins rated up to and including 3 hrs.

Only those products bearing the UL Classification Mark should be considered as being covered by UL's Classification and Follow-Up Service.

The UL Classification Mark includes: UL in a circle symbol:  with the word "CLASSIFIED" (as shown); a control number (may be alphanumeric) assigned by UL; a statement to indicate the extent of UL's evaluation of the product; and, the product category name (product identity) as indicated in the appropriate UL Directory.


Look for the UL Classification Mark on the product

Issued by:


Mona Couloute

Underwriters Laboratories Inc.

Reviewed by:


Matthew Schumann

Underwriters Laboratories Inc.

Certificate of Compliance

Certificate Number 20080430-R6666C

Report Reference R6666

Issue Date 2008 April 30

Page 2 of 2



**Underwriters
Laboratories Inc.®**

8'0" x 8'0" pair of doors swinging in the same direction and double egress with 18, 16, 14 gauge face skins rated up to and including 3 hrs.

3'6" x 7'2" dutch door with 18 or 16 gauge face skins.

This is to verify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.

Issued by:

Mona Couloute
Mona Couloute

Underwriters Laboratories Inc.

Reviewed by:

Matthew Schumann
Matthew Schumann

Underwriters Laboratories Inc.