

# StormPro<sup>®</sup> Surface Vertical Rod Exit Tornado Resistant Assembly UL Classified to ICC500 - 2014

## Available Sizes:

- Pairs 6'0" x 7'0" min. to 8'0" x 8'0" max. without mullion
- Singles 3'0" x 7'0" min. to 4'0" x 8'0" max.

## Frame Type:

- StormPro 14 gauge frame, 5-3/4" depth thru 14"
- 4" head option
- Masonry or EO anchors

## Door Type:

- 16 gauge StormPro door with polystyrene core and liner (Honeycomb core if fire rated)

## Hardware Options

- Surface Vertical Rod Exit Device: SARGENT FM8700 (mullion not available)


## Hinges:

- McKINNEY SP BUTT HINGES
- McKINNEY MCK-HG305 continuous hinges
- MARKAR HG-305 continuous hinges

## Accessories:

- Door closers, perimeter seals, electronic power transfer, and door position switches are also available

1502 12th Street NW  
Mason City • IA 50401  
Phone: 641-423-1334  
Fax: 641-424-8305

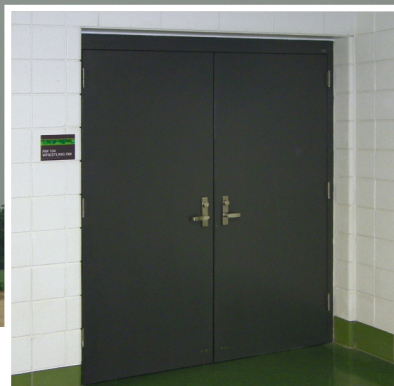

CURRIES StormPro<sup>®</sup> Surface Vertical Rod Exit assemblies include paired openings 6'0" x 7'0" minimum through 8'0" x 8'0" maximum without a required mullion. Single openings are available from 3'0" x 7'0" minimum to 4'0" x 8'0" maximum. These StormPro<sup>®</sup> assemblies give end-users another option for creating highly functional safe rooms with easy means of egress.

The StormPro<sup>®</sup> Surface Vertical Rod Exit assembly helps shield occupants in a safe room from flying debris. The assemblies are UL classified to ICC-500 2014 and comply with FEMA P320 and P361. StormPro<sup>®</sup> doors are also fire rated up to and including 3 hours. As with all StormPro<sup>®</sup> products, the third party Underwriters Laboratory certification labels are applied to each assembly.

Verify your anchor details at: [www.curries.com](http://www.curries.com)