

STC 40-47 With Quiet Noise Decorative Panel Doors

APRIL, 2012

Door Sizes

- HD 2 Panel Design 18 gauge galvaneal steel: 2868-3080
- 6 Panel Design 18 gauge galvaneal: 2668-4070

Frame Configurations

- Standard 16 or 14 gauge galvaneal steel
- 4-1/8" through 14" depths
- Welded corners
- Frames should be backfilled with mortar in the field

Hardware Preps

Hinges:

- Standard 4.5 x .134
- Heavy weight and 5" optional
- Cam-lift hinges and offset pivots optional



CURRIES has again expanded the 757 Quiet Noise product offering to include Decorative Panel doors. Quiet Noise Decorative Panel doors control sound up to a STC 47 rating, while adding beauty and sophistication to the opening.

Quiet Noise Decorative Panel doors are available in a 6 panel and high definition 2 panel designs. Perfect for airports, healthcare, hospitality, government/military and municipal buildings as well as educational institutions. These products are in addition to the STC 32 - 54 door systems already available.


Quiet Noise is competitively priced and can be manufactured in 4-6 weeks. Quiet Noise doors include the door and approved seal systems with a certified label. All products have been successfully tested to the required ASTM standards, including ASTM E90, ASTM E1332 and ASTM E413. All Quiet Noise doors are in compliance with HMMMA 865 and SDI 128 specifications. Seals and ADA compliant thresholds will be drop shipped to designated address.

Log onto www.curries.com for more information about our full line of Quiet Noise products.


STC 40-47 With Quiet Noise Decorative Panel Doors

Decorative Panel Configurations


	STC Rating	Lock Type	Door Design	Undercut	Max. Fire Rating	Seal Set	Seal Set Description
Single Doors	47	Cylindrical	6 Panel	3/8"	45 Minute	A	Pemko Seals: S88, S44, S773, S771, ACP112, 2005 threshold
	46	Cyl/Mort	6 Panel	3/8"	45 Minute	A	Pemko Seals: S88, S44, S773, S771, ACP112, 2005 threshold
	46	Cylindrical	2 Panel	3/8"	45 Minute	A	Pemko Seals: S88, S44, S773, S771, ACP112, 2005 threshold
	45-40	Cyl/Mort/Rim	6 Panel	3/8"	45 Minute	A	Pemko Seals: S88, S44, S773, S771, ACP112, 2005 threshold
	45	Cyl/Mort	2 Panel	3/8"	45 Minute	A	Pemko Seals: S88, S44, S773, S771, ACP112, 2005 threshold
	44-40	Cyl/Mort/Rim	2 Panel	3/8"	45 Minute	A	Pemko Seals: S88, S44, S773, S771, ACP112, 2005 threshold

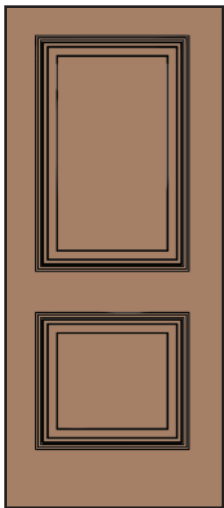

2P

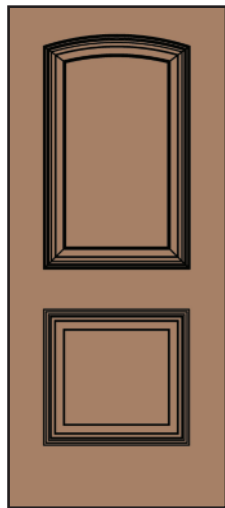

2PA

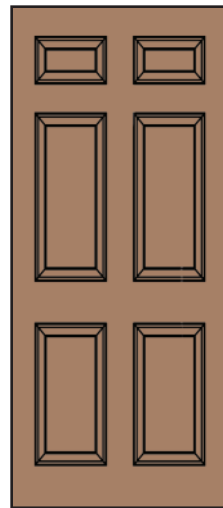

E6



2PAP

1502 12th Street NW
Mason City • IA 50401
Phone: 641-423-1334
Fax: 641-424-8305

ASSA ABLOY, the global leader
in door opening solutions

Copyright © 2012, AADG, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of AADG, Inc. is prohibited